



Double-Ended Cordsets

#18 AWG yellow AWM 2661 cable – auto color code
 Oil-resistant PVC jacket
 Low-resistance contact design with gold/palladium nickel plating

NEW	3P	4P	5P
FEMALE FACE VIEW			
COLOR CODE	1- green-gnd 2- red w/ black trace 3- red w/ white trace	1- red w/ black trace 3- red 2- red w/ white trace 4- green-gnd	1- red w/ white trace 4- red w/ yellow trace 2- red 5- red w/ black 3- green-gnd
VOLTAGE	300V AC/DC	300V AC/DC	300V AC/DC
CURRENT	10A	7A	5.6A
CONDUCTOR	#18-3	#18-4	#18-5

FEMALE/ MALE	FIG	DOUBLE-ENDED CORDSETS WITH #18 AWG PVC CABLE 3 FEET LONG		
STRAIGHT/ STRAIGHT	1	113020A03F030	114020A03F030	115020A03F030
90°/STRAIGHT	2	113021A03F030	114021A03F030	115021A03F030
STRAIGHT/90°	3	113022A03F030	114022A03F030	115022A03F030
90°/90°	4	113023A03F030	114023A03F030	115023A03F030

CATALOG OPTIONS

Use the following chart to modify your part's specifications

113020A03F0301

CABLE LENGTH

6'	060
12'	120
20'	200

COUPLING NUT

STAINLESS STEEL	ADD 1
NON-METALLIC	ADD 2

Specifications

3P to 5P



- MECHANICAL**
 CONNECTOR FACE: PVC - UL STD 94 - V0
 MOLDED BODY: PVC - UL STD 94 - V0
 COUPLING NUT: ZINC DIECAST W/ BLACK EPOXY COAT, OPTIONAL STAINLESS STEEL TYPE 303 OR NON-METALLIC GRAY NYLON 6/6
- CABLE:**
 YELLOW, #18 AWG, PVC JACKET & PVC CONDUCTOR INSULATION OVER 41 X #34 COPPER STRANDING, 300V, UL STYLE 2661, CSA AWM I/II A/B
- OUTSIDE DIAMETER:**
 3P - .28" (7.1mm)
 4P - .28" (7.1mm)
 5P - .28" (7.1mm)
- ELECTRICAL**
 VOLTAGE RATING: 300 V AC/DC
 AMPERAGE:
 3P - 10A
 4P - 7A
 5P - 5.6A
- ENVIRONMENTAL**
 PROTECTION: IP 68 NEMA 6P
 AMBIENT OPERATING TEMP: -4° TO 221° F (-20° TO 105° C)
- CERTIFICATIONS**
 UL: UL RECOGNIZED, FILE NO. E46237
 CSA: CSA CERTIFIED, FILE NO. LR6837

CONNECTOR DIMENSIONS

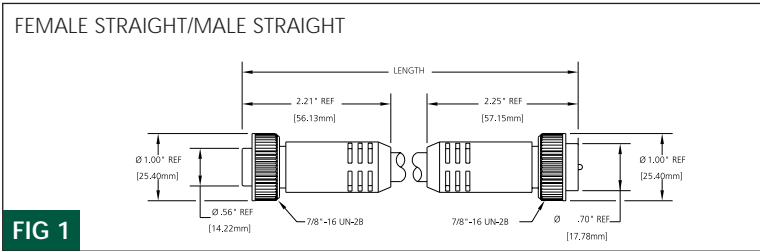


FIG 1

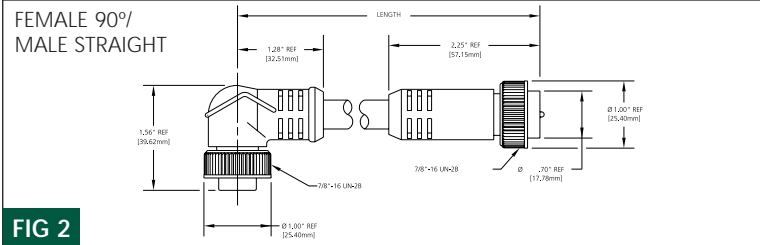


FIG 2

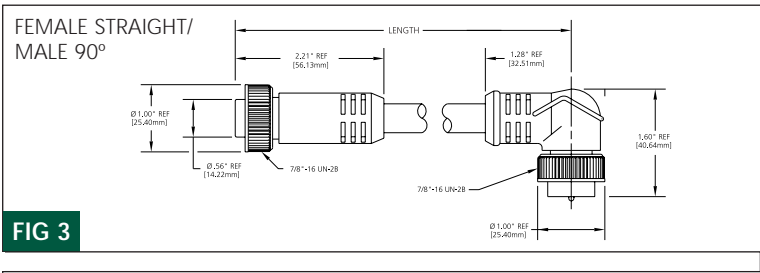


FIG 3

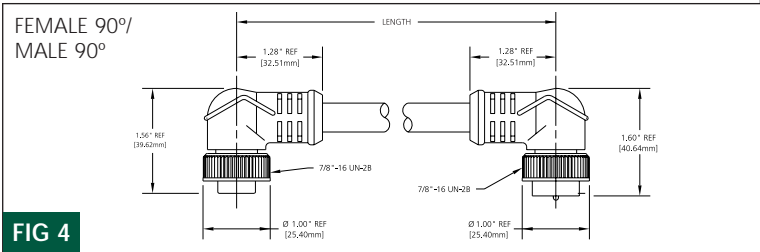


FIG 4

